

Kennisbank > Products > Industrial HiVision > Configuration Signature Check

# Configuration Signature Check

- 2018-02-21 - Industrial HiVision

As of v6.0 IHV is able to monitor the configuration signature of a device (Platform4,

Platform5, EAGLE)

Therefor the signature is stored in a property.

The standard polling/status configuration can be used for comparing the configuration signature to the reference signature.

This lesson describes how to set a reference value of the configuration signature and how differences are displayed.

#### **Configuration Signature Properties**

Status N	Connections Properties Security St	Reveal		
Interfaces				
Configuration File	Current Configuratio			
Configuration Sec	value all the be			
Serial Number	945434099010402711			
Temperature				
OR Cade	B4043400 - 550-24	~		
System Start	2015-04-24-09-37745	172.16.1.220 - Configs	anation Signature Properties	22
Contact	Hisdware Automat	1		
Location	Hirschmann Railswitch	Property		
Name	R0-276020	- Current	172.16.1.220	
Location Country	des.			
Chemin	P520-2400H2	Property:	Configuration Signature	
Freduct	8520			
Vendor	History	Digitize		
Autoconfig Adapt				
Agent		Nane		
Configuration Sta	tua Savad	low:		
Fort24			50 50	
Port 23				
Port 22			Testistic Alexinant	
Fort 21			2	
Port 30		16.0	2	
Port 19				
<ul> <li>Port 35</li> </ul>		Current Takes	d0 £2 eo be Rekal	
<ul> <li>Fort 17</li> </ul>				
Port 25		-		
Port 15		4		
Port 14		4		
Port 13		1		Community of the second second second
Port 12		1	Apr 27, 2015 12:49:13/PM	172.15.1.229 - Configuration Signature Status Config
Port 11		in starp.	April 20, 2010 12 Million	hipely
Port 10		1 talac	Change After Trap	
Fort 9		1		Componenti 172.36.1.320
		•	1 Pal	
Port 8				Property Configuration Stration
Port 7		Colora Indexes		Property: Configuration Signature
Port 6		Foling Interval:	1 Hars -	
Port 6 Fort 5				Status Carlig
Port 6 Port 6 Port 5 Port 9		History:	1 Harz •	Status Carlig
Port 7 Port 6 Port 5 Port 4 Port 3			1 Harz •	Status Carlig
Peril 7 Port 6 Port 5 Peril 4 Poril 3 Port 2		Helbrys Duffer Stati	1 Hours - [] Feand 200	Status Carlig
Port 7 Port 6 Port 5 Port 3 Port 3 Port 2 Port 1		History:	1 Hours - [] Feand 200	Status Carlig
Part 7 Part 6 Part 5 Part 4 Part 3 Part 2 Part 2 Part 1		Helbry: Duffer Stee Shew Yake in Taolog ofi	1 Hours - [] Feand 200	Status Carlig
Part 7 Port 6 Part 5 Part 5 Part 4 Part 3 Part 2 Part 2 Part 1 Power Supply 2		Helbrys Duffer Stati	1 Hours - [] Feand 200	Status Carlig
Port 7 Port 6 Port 5 Port 5 Port 3 Port 2 Port 2 Port 1 Port 2 Port 2 Port 2 Port 2 Port 2 Port 2 Port 2 Port 5		Hottary: Durfter Stree Show Take in Taulity of Status	1 Fourie - Three Street	Status Carlig
Peri 7 Port 6 Port 5 Port 3 Port 3 Port 2 Port 1 Port 2 Port 1 Port 2 Port 1 Port 2 Port 1 Port 2 Port 5 Port 5 Port 4 Port 3 Port 5 Port 5 Port 5 Port 3 Port 3 Port 5 Port 5		Hotary: Doffer See: Show Yake in Tankto off Status Current Batus	1 Fours -	Batus Carly Rafinance Induct 40: 52: en: be Valer Status
Port 7 Port 6 Port 5 Port 5 Port 3 Port 2 Port 2 Port 1 Port 2 Port 5 Port 2 Port 2 Port 2 Port 2 Port 2 Port 2 Port 6 Port 5		Hotary: Doffer See: Show Yake in Tankto off Status Current Batus	1 Pours	Batus Carly Raferon Yolus 60 52 eo tre Value Stelan
Peri 7 Port 6 Port 5 Port 3 Port 3 Port 2 Port 1 Port 2 Port 1 Port 2 Port 1 Port 2 Port 1 Port 2 Port 5 Port 5 Port 4 Port 3 Port 5 Port 5 Port 5 Port 3 Port 3 Port 5 Port 5		Hetery: Doffer See: Shew Yake in Tuellip of Status Concert Status Status	1 Fours	Batus Carly Rafinance Induct 40: 52: en: be Valer Status
Peri 7 Port 6 Port 5 Port 3 Port 3 Port 2 Port 1 Port 2 Port 1 Port 2 Port 1 Port 2 Port 1 Port 2 Port 5 Port 5 Port 4 Port 3 Port 5 Port 5 Port 5 Port 3 Port 3 Port 5 Port 5		Hetery: Doffer See: Shew Yake in Tuellip of Status Concert Status Status	1 Pours	Batus Carly Raferon Yolus 60 52 eo tre Value Stelan
Peri 7 Port 6 Port 5 Port 3 Port 3 Port 2 Port 2 Port 1 Port 2 Port 1 Port 2 Port 5 Port 9 Port 9 Po		Hetery: Doffer See: Shew Yake in Tuellip of Status Concert Status Status	1 Fours	Batus Carling Rafinance Induct all: E2 en ite Value Status Value Rafinance Induct
Peri 7 Port 6 Port 5 Port 3 Port 3 Port 2 Port 1 Port 2 Port 1 Port 2 Port 1 Port 2 Port 1 Port 2 Port 5 Port 5 Port 4 Port 3 Port 5 Port 5 Port 5 Port 3 Port 3 Port 5 Port 5		Hetery: Doffer See: Shew Yake in Tuellip of Status Concert Status Status	1 Fours	Batus Carling Rafinance Induct all: E2 en ite Value Status Value Rafinance Induct

- 1. double click on the property **Configuration Signature**
- 2. press reload to download the current configuration signature from the device
- 3. tick check box **Determine Status**
- 4. open the status configuration
- 5. set the current value as reference value


### Change the configuration

Мар	list D	evices Ports Connections P	roperties Security Status			
Type A	Status	Name	value	Reason		
	Š	Interfaces Configuration File Configuration Signature Serial Number Temperature		172.16.1.220 - Locatio	n: Properties	
N N N		QR Code System Start Contact Locasion Name	943434999+R520-24 2015-04-24.09:37:07 - Hirschmann Autonati Hirschmann Raiswitch - RS-256ED8 -	Property:	172.16.1.220 Location	
		Location Coordinates Chassis Product Vendor Autoconf gAdapter Agent Configuration Status	RS20-2400M2 RS20 Hirschmann Saved	Ditplay Name: Icon:		
		Port 24 Port 23 Port 22 Port 21 Port 20 Port 19 Port 18 Port 17 Port 16		Timestamp:	Neckartendingen Apr 27, 2015 12:00:15 Change After Trap Pol	Relaad Write
		Part 15 Part 14 Part 13 Part 12 Part 12 Part 10 Part 10 Part 9 Part 8	-	Pailing Interval: History: Buffer Size: Show Value in Tooltp of:	Record 100	Show
		Port 7 Port 6 Port 5 Port 4 Port 3 Port 2 Port 1 Port 2 Port 1		Status Current Status: Status:	No Status Determine Forward Status Up 4	Status Carrilg
	3	Power Supply 2 Power Supply 1 Relay 1 Security	- - Warring (	Sanstuk 172 16 1 201 Sanst		Apply Cancel Help

Change the device configuration e.g. the device location:


- 1. double click the property location
- 2. change the current value
- 3. press write
- 4. close the dialog with ok

## MultiConfig

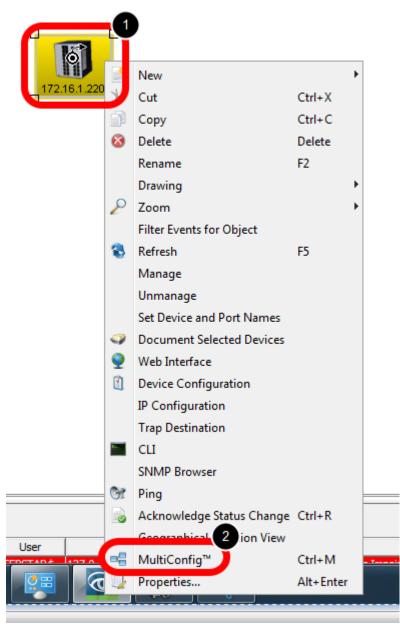

- 1. right click the device on which you just changed the location property
- 2. select MultiConfig from the context menu

### Save the configuration

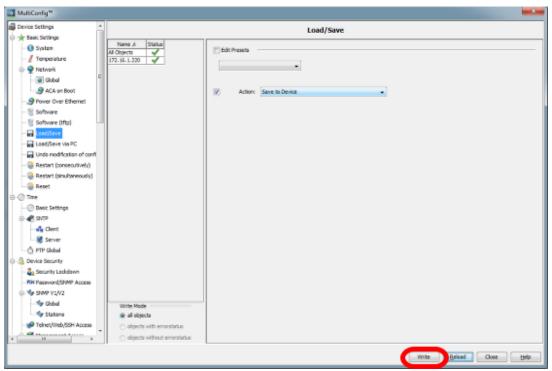

Save the configuration by pressing Write in the Load/Save dialog

#### **Configuration Signature - Status Impairment**

