

## Industrial Hivision Scheduler - Save Device Configurations

John M - 2019-12-23 - Industrial HiVision

This guide is designed to walk through the steps to configure Hirschmann Industrial HiVision to enable the scheduled remote backup of Configurations of the Hirschmann devices in a project.

1. Once Hivision is running go to the Device tab and highlight the devices that need the configurations saved, right click on one of the highlighted devices and select Save Device Configuration.

File Edit View Configuration Tools Help

Back

Forward

Up

Logout

Home View

Undo

Find

Edit Mode

Properties

WWW

Scan Network

HDiscovery Scan

Preferences

Events: 0 0 0 123

Most Severe Recently: 2019-03-19 14:19:32 192.168.0.64Module 2Port 1,2,3... Status Improvement: OK (PoE Class 0 Detection-Info)

VLAN: All

Map List Devices Ports Connections Properties Security Status PoE

Device Class: All

Type	Status	Name	IP Address	MAC Address	Product	Chassis	Serial No.	System Name	Location	Contact	Firmware Version	Chassis Name	Configuration Sig.	POH up to
		192.168.0.2	192.168.0.2	EC-E5:55:66:98-E9	EAGLE 2070	EAGLE 20-040099...	94205899900030...	EAGLE-6CE55568...	Hirschmann EAGLE	Hirschmann Auto...	HSec09-03.0.00		339454380C3E38...	
		192.168.0.9	192.168.0.9		Ping Device									
		192.168.0.11	192.168.0.11		Ping Device									
		192.168.0.75	192.168.0.75	EC-74:8A:26:5C:A4:9C	RSP-37-340407	RSP-37-340407...	94208499901070...	RSP-EC74A095...	Hirschmann RSP	Hirschmann Auto...	H026-35-07.0.04	FX0ED37AA67...		
		192.168.0.77	192.168.0.77	EC-E5:55:FF:D1:4B	BAT-#	BAT-#	94207099904150...	BAT-#_master	www.hirschmann...					
		192.168.0.79	192.168.0.79	EC-E5:55:FF:D1:4B	BAT-R	BAT-R	94207099900000...	BAT-R_WALIMAS...	www.hirschmann...					
		192.168.0.79	192.168.0.79	EC-E5:55:FF:D1:4B	BAT-R	BAT-R	94207099903940...	BAT-R_2p	www.hirschmann...					
		192.168.0.160	192.168.0.160	EC-E5:55:36:70:88	RSD-1600M2	RSD-1600M2...	94343405525580...	Row 11H	Hirschmann Rals...	Hirschmann Auto...	1.2E-59.0.07	16 88 4d 4d		
		192.168.1.1	192.168.1.1		Ping Device									
		192.168.1.80	192.168.1.80	D0-8B:63:48-8E:FF	R320-800M2	R320-800M2...	94343400000000...	office switch	Home office	Hirschmann Auto...	1.2E-59.0.07	7a 09 3b 8c		
		192.168.1.67	192.168.1.67	24FD:31:22:58:29	BAT-#	BAT-#	94207099900000...	BAT-#_742-30N	www.hirschmann...					

My Network


New Devices

Used Devices


Rogue Devices

Unregistered Devices


2. Browse to the location the configurations need to be saved to, set the start time (making sure to leave enough time to finish the schedule before it starts), and frequency the configurations need to be saved. Then make sure all of the other settings are selected properly and click OK.

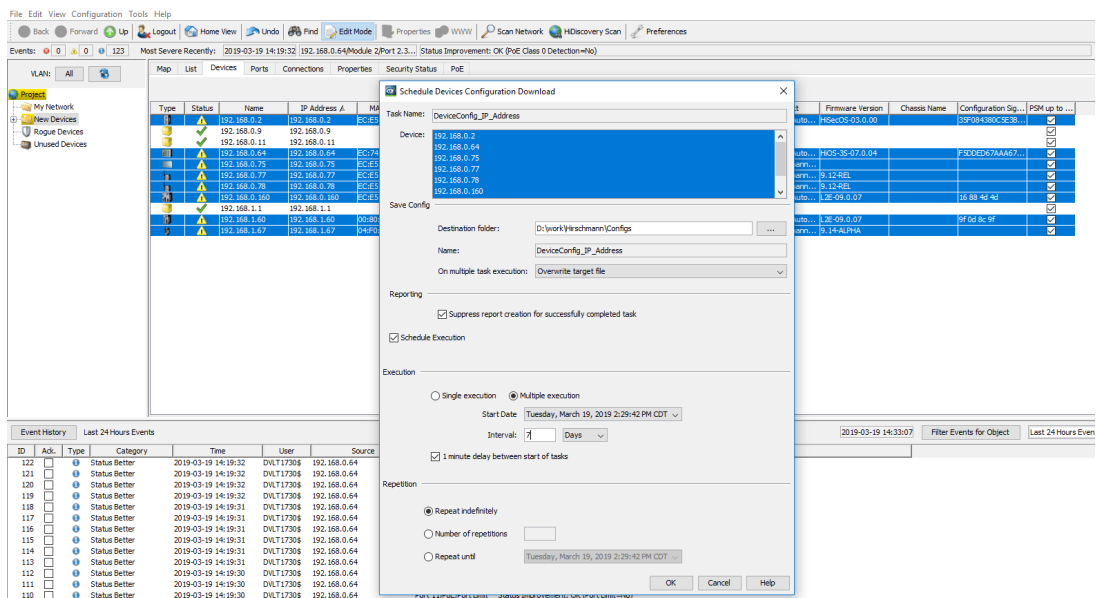


3. To verify it has been scheduled click on Configuration in the taskbar and select Scheduler, the task tab will show the devices and the task to be performed

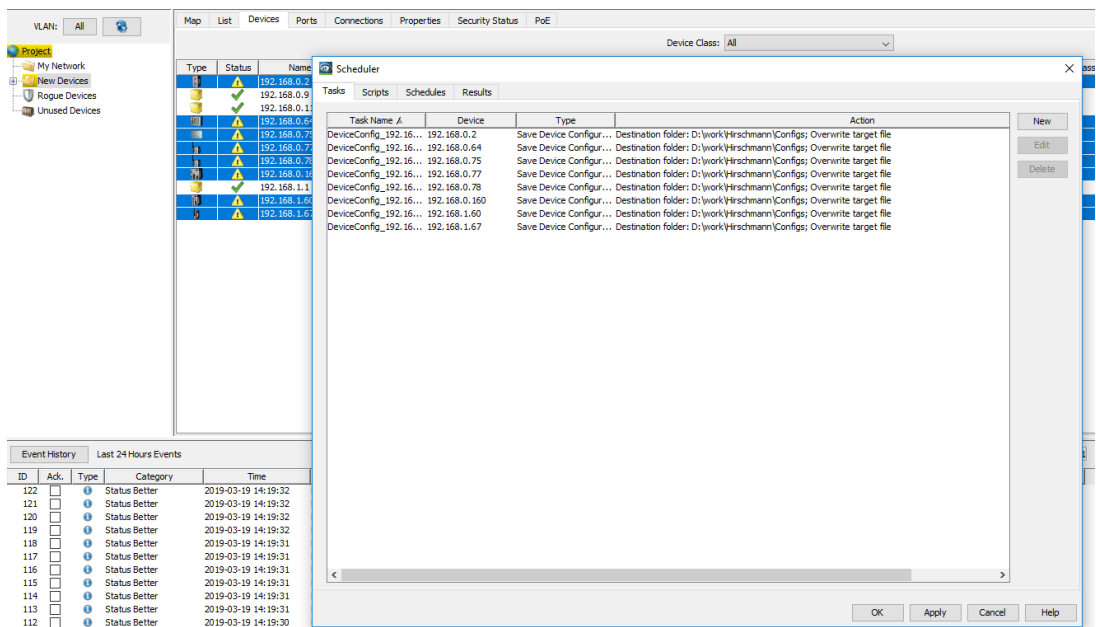

4. The schedules tab will show the schedule to perform the tasks.

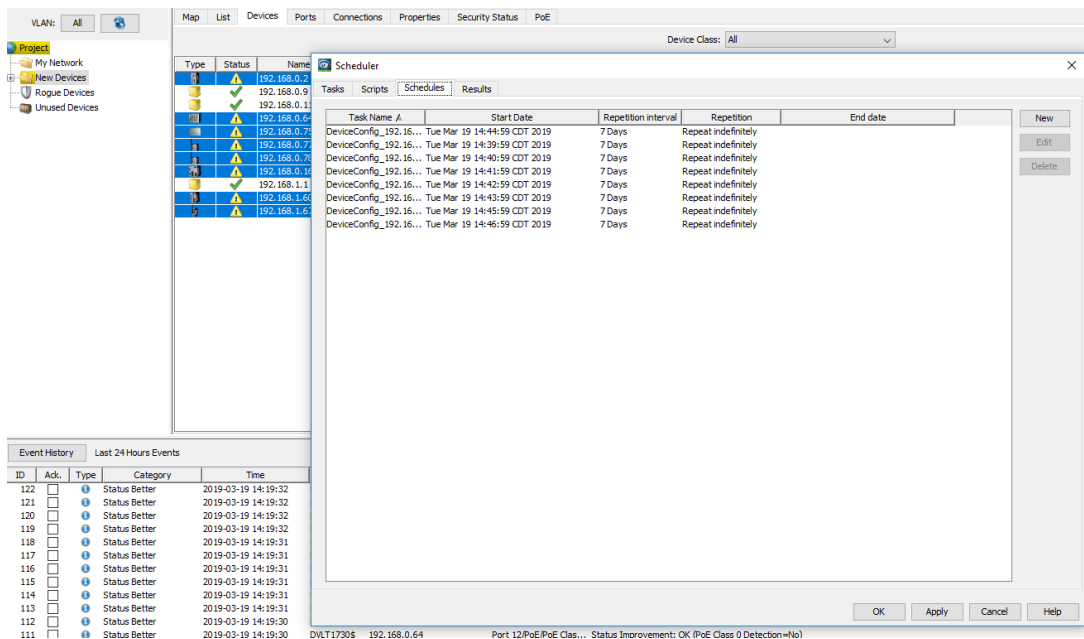

5. To verify the tasks have been completed click on the results tab.

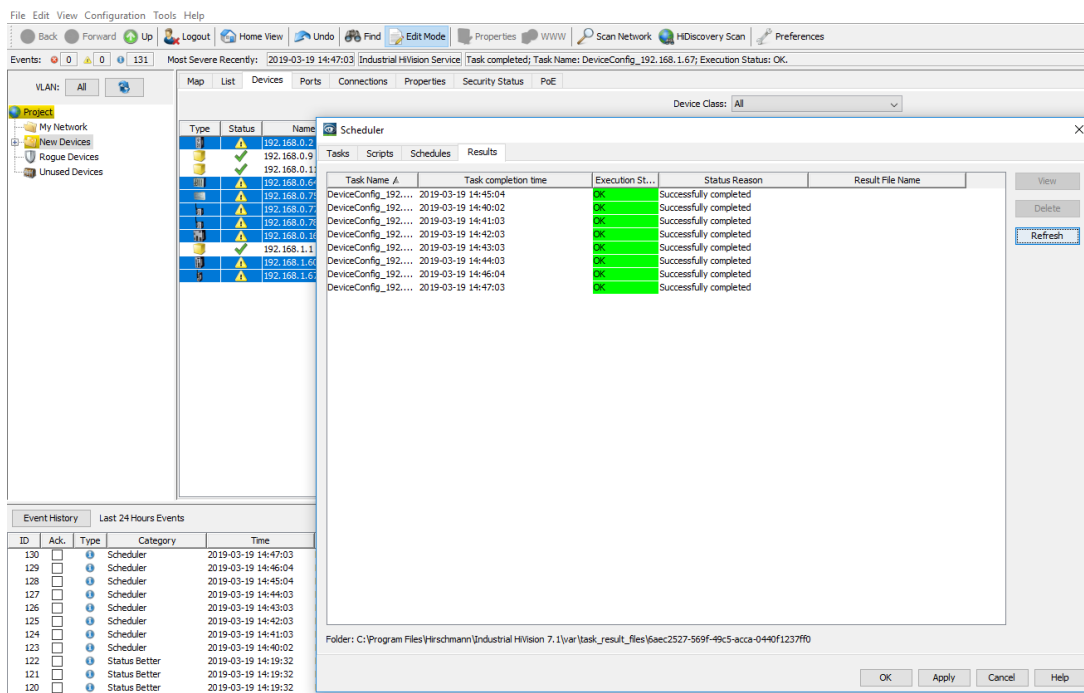

6. Finally verify the configurations have been saved to the correct location.

